

> We are DEVELON

We trace our roots to 1937 as one of Korea's first large scale machine plant. Throughout time we have consistently delivered exceptional products and solutions.

DEVELON is a bold name that reflects our core ambition to continue developing onwards and leaving behind a positive footprint in our world. Moving forward, we seek to be part of our customers and partners' endeavor to build a better world.

Powered by **Innovation**



©2025 HD Hyundai Infracore. All rights reserved.
HDIPBE-01-2508

develon-ce.com

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Develon equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Pictures of Develon units may show other than standard equipment.

DEVELON

Excavators

DX450LC-7M



Photos may include optional equipment

ARRIVAL OF WILD HERO

DX450LC-7M

Most Valuable Player in New Tough Generation, New Hero In-Shape for Your Business

Time for the bolder work. In the distance, DX450LC-7M, captivates you with charisma from the very first encounter. Most valuable player and your reliable and only hero. Irresistible risk-taker and rule-breaker. The genes of legendary predecessors with a flawless performance and unbridled enthusiasm. Whatever goal you need to reach, DX450LC-7M would come through with brilliant strength and daring new attitude.

DX450LC-7M is uncompromising hero made for works without limits. With a controlled aggression beneath the bold proportion, the power remains poised. Restless seekers, gaining ground, pursuing innovations. Flexible transformers, ready to fit your site and your conditions. Dark knights with legendary capabilities featuring intelligent technologies. With extra sensory perception, herculean power, they never miss the chance.

Always poised to make an entrance on scene whenever needed. DX450LC-7M, the most valuable player and absolute hero ready to save your business.



The Statement of Reliability, Develon is Here for You with Complete Solution for Your Business.

HERCULEAN POWER AND LEGENDARY PRODUCTIVITY

DX450LC-7M provides the best productivity in heavy quarries and mining site. Matchless workload provided by superior arm digging force and unparalleled bucketload. Powered by a reliable Develon engine delivers peerless power and large swing torque, needed for high performance in heavy quarry and mining site.

UNCOMPROMISING QUALITY FOR TOUGH WORK

DX450LC-7M is featured by reinforced heavy-duty arm and boom with fortified undercarriage to withstand high-impact materials. Designed using reliable element and formed in optimal structural integrity. Ensuring long life and high uptime even in extreme job sites.

WE ARE BACK WITH NEW FEATURES

All The Nice Features of Previous Model
Bodily Succeeded, Even Nicer Things to Come.

DRY TYPE PRE-CLEANER

The installation of a rotor type pre-cleaner provides better filtering in dusty environments. Increased maintenance interval resulting in more uptime.

REINFORCED BOOM AND ARM

Reinforced castings and forged steel pivot points. Reinforced heavy-duty arm and boom with new optional boom floating system. To better protect the base of the arm, reinforced bars have been added and the arm center and end boss have been strengthened.

HEAVY-DUTY UNDERCARRIAGE

Heavy duty X-shaped undercarriage with integrated track spring and idler. Offered with durable box section track frame. The sprocket structure and tooth have been strengthened to prevent debris and increase durability.

DEVELON FLEET MANAGEMENT (OPTIONAL)

Offering 'preventive maintenance service' based on machine operating data. Providing an expert level consultation to dealers. Functioning as fleet management tool for the customers.

ADVANCED H+ CLASS BUCKET

Bucket robustness fortified by increased the area of the abrasion resistant plate. Applying heel saver and edge saver to significantly increase the durability of bucket.

WATER SEPARATOR

A filter-type high-performance water separator effectively filters moisture out in the fuel, reducing impurities and helping minimize engine issues.

ADDITIONAL WORKING LAMP (OPTIONAL)

New additional working lamp contributes to enhanced safety through improved illumination. 2ea and 6ea for each of the model.

AIR COMPRESSOR (OPTIONAL)

Easily lubricated, highly reliable and low maintenance air compressors are equipped.

ETP (ELECTRIC TRANSFER PUMP) (OPTIONAL)

Electric transfer pump enables to change speed of front movement depending on the hydraulic flow consumption of linked attachment. Upgraded operational ease guarantees linear and smooth movement of attachment.

ROPS CERTIFIED CABIN (OPTIONAL)

One of the most spacious cabs in the market, with low noise & vibration levels and excellent all-round visibility. Offered with fully adjustable suspension seat, air conditioning with climate control as standard.

SINGLE CATWALK (OPTIONAL)

The upper structure features a larger anti-slip surface for greater safety.

HEATING AND COOLING SEAT (OPTIONAL)

The optional, air-suspended, climatized driver's suspension seat provides pleasant seating conditions and a high level of comfort.



*Option spec info is included to the images contained in this material and may not be the same with the actual specs.

POWER LIKE NO OTHER



SWING DRIVE

Swing drive minimizes shock during rotation, while making increased torque available to ensure rapid cycles.

EPOS™ (ELECTRONIC POWER OPTIMIZING SYSTEM)

The smart EPOS™ provides a perfectly synchronized communication link between the engine's electronic control unit and the hydraulic system. A CAN (Controller Area Network) system enables a constant flow of information between the engine and hydraulic system, to ensure power is delivered exactly as needed.

Real Partner With Unparalleled Engine Power and Differentiated Digging Force for Tough Application

Next generation of power and intelligence. With DX450LC-7M you can take even the heaviest work with ease. DX450LC-7M has matchless workload with about 10% more arm digging force and 20% more bucketload than class average. Develon in-house engine delivers excellent force and high torque, while improved hydraulic system get the most out of the superior engine power. Above all, DX450LC-7M can even operate with attachments made for 50ton excavators with enough pump flow and lifting capacity. All features optimized for greater working range and fast digging speed needed for high performance in heavy quarry and mining site.

More innovations delivers even more impressive performance. EPOS™ hydraulic system ensures the engine power to be exactly delivered. Electronically controlled hydraulic pump efficiently changes speed of front movement depending on the hydraulic flow consumption of attachment usage.

DEVELON ENGINE (DC13)

The DC13 is powered by economic and powerful DC13 engine. Advanced DC13 engine delivers a superior performance. High-pressure fuel injection and precise timing provide optimized fuel consumption. High power and wide torque range at low RPM, which can also reduce the strain on the clutch and transmission. Delivering performance which can be adapted to your various needs, for maximum productivity.



ELECTRONICALLY CONTROLLED HYDRAULIC PUMP

Electronically control the pump by generating virtual hydraulic flow, which effectively works on effectively reduce fuel consumption and high productivity. This control enables to change speed of front movement depending on the hydraulic flow consumption of linked attachment. Upgraded operational ease guarantees linear and smooth movement of attachment. Hydraulic flow can be controlled by the intuitive button or switch.



ON TOP FORM WHEN IT MATTERS

Designed for Longevity,
Built to Last on Top Forms



We are certain that DX450LC-7M is an excavator that can satisfy virtually any demand placed on it by work in tough construction sites. Whether you're working on a quarry, in mass excavation or any other construction applications, DX450LC-7M will satisfy you on heavy-duty work you need to work on.

DX450LC-7M is developed with the most unwavering efforts to detail during its production. Increased lifespan of components by improved abrasion-resistance and additional protection. For superior durability, the undercarriage components are reinforced, ensuring long life and high uptime. Lasting technology and structural design completed by thorough analysis, enable Develon's equipment to last under the harshest conditions.



HEAVY DUTY BOOM & ARM

The strong and durable structure includes a reinforced boom and arm made from high strength tensile steel for maximum reliability. Combined with thicker material, mechanical stress is equally distributed and both reliability and component life are increased. To better protect the base of the arm, reinforced bars have been added and the arm center.

INTEGRATED TRACK SPRING AND IDLER

The track spring and idler have been joined directly for even greater durability and improved maintenance convenience.

IMPROVED PILOT HOSES

Hoses material changed to rubber type, with a new fitting reducing the curvature. Improved pilot hoses facilitated the hydraulic flow and reduces internal pressure.

HEAVY DUTY UNDERCOVER

Advanced undercarriage with strengthen sprocket structure and tooth. Offering increased durability by providing additional protection to the underside of the machine in tough applications – preventing damage from rock and debris .Heavy duty X- shaped undercarriage ensures optimum structural integrity and durability. Cast steel heavy-duty sprockets guarantee the highest resistance and thick and solid plates providing maximum durability in harsh conditions.



EM BUSHING

The boom pivot is made with a highly lubricated metal to increase the lifespan and extend greasing intervals to 250 hours. cancellation and anti seizure property. Used polymer shim with hard metal disk for less abrasion.



ABRASION-RESISTANT ARM END DISK


New disks have been adopted to increase wear resistance and service intervals.

CONDENSED FOR EFFICIENCY

Innovative Short Cuts to Greater Efficiency

DX450LC-7M's optimized fuel consumption enabled by high-end technology reduces operating costs. Advanced systems combined with innovative integration, result in best of both worlds, increased performance and fuel efficiency.

Develon electronic controlled pump – VBO(Virtual Bleed Off) system'- result of technological integration. Improved hydraulic system uses the engine power more effectively, maximizing pump output and offering more. A standard auto-idle feature which automatically puts the engine and pump into the standby mode when it detects a pause. Develon's engine and pump matching technology, not only economical but also environmentally responsive with significantly reduced exhaust fumes. Do more with low fuel consumption and overall operating costs.

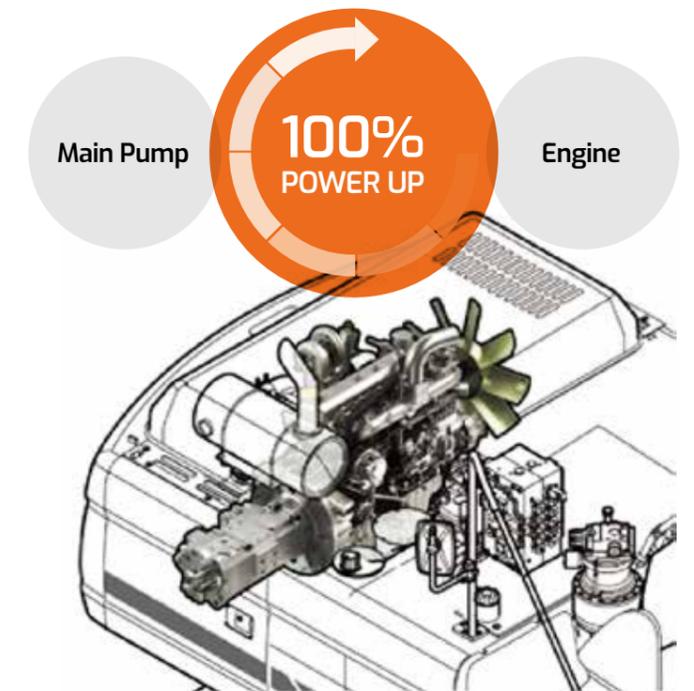

PUMP MATCHING TECHNOLOGY

Pump matching technology resolves problems as the low response time of the system and unnecessary fuel consumption. Matching the response time between pump and engine efficiently reduces unnecessary fuel consumption as well as reducing exhaust fumes.

AUTO IDLE

A standard auto-idle feature reduces engine rpm when the steering wheel or joystick isn't being used. The system automatically puts the engine and pump into the standby mode when it detects a pause during operation. The engine will be automatically switched off when the machine is inactive for a pre-set amount of time. This function helps reduce fuel consumption and noise.

RELIEF CUTOFF

DX450LC-7M is equipped with a relief cutoff system. The system automatically detects excess hydraulic pressure in the cylinder and controls it by redirecting the hydraulic flow back to the main pump. Relief cutoff system distributes excessive pressure in hydraulic components to be maintained in the optimal state.

HOME AWAY FROM HOME

You Are at the Center of Comfort and Control



DX450LC-7M will ensure you that your work and comfort go hand in hand. DX450LC-7M created user friendly and restful, tranquil setting through functional simplicity and with design enabled technologies. Crafted from the fine materials, DX450LC-7M's interior brings together comfort, aesthetic qualities and up-to-date technology.

Enhanced personal space with climate control systems, and various convenient features. Designed to meet operational need thoroughly, the high-definition display control lever and other intuitive features brings absolute controllability in your fingertips. All elements provided to ensure the operator to work in safe and comfortable condition no matter the work site is.



1



2

3



4



5



6



7



8

1. SMALL DETAILS ADD THE FEELING OF REFINEMENT

Heating and ventilation, air conditioning system upgraded for pleasant environment. USB charger and sunglass case is also equipped for additional comfort. Rear sun visor is also equipped for UV protection.

2. SPACIOUS CABIN COMFORT

Refined interior with enhanced legroom and extendable storage space guarantees a serene ride to you. A more orderly interior equipped with high-class designed upholstery and thoroughly changed comfort accessories. This ensures operator to have a clear and uncluttered workplace at all times.

3. HEATING AND COOLING SEAT (OPTIONAL)

The optional, air-suspended, climatized driver's suspension seat provides pleasant seating conditions and a high level of comfort. Heating and cooling temperature range segmented in three stage to meet various customer needs.

4. ADDITIONAL WORKING LED LAMP (OPTIONAL)

New additional working lamp contributes to enhanced safety through improved illumination. 2ea and 6ea for each of the model.

5. CONTROL LEVER

Precise control of the equipment increases versatility, safety and facilitates tricky operations requiring great precision. Leveling operations and the movement of lifted load made easier and safer.

6. REAR VIEW CAMERA (OPTIONAL)

Optional side and rear-view camera keep watch in ways beyond operator's sight. Additional LED lighting system attached on each side for the clear identification.

7. 8-INCH TOUCH SCREEN MONITOR

New, user-friendly LCD color monitor with full access to machine settings and maintenance data.

8. SIMPLE OPERATION

Precise control of the equipment increases versatility, safety and facilitates tricky operations requiring great precision. Leveling operations and the movement of lifted load made easier and safer. Joystick and switches integrated in control stand for precise operation.

1. SMALL DETAILS ADD THE FEELING OF REFINEMENT

2. SPACIOUS CABIN COMFORT

3. HEATING AND COOLING SEAT (OPTIONAL)


4. ADDITIONAL WORKING LED LAMP (OPTIONAL)

5. CONTROL LEVER

6. REAR VIEW CAMERA (OPTIONAL)

7. 8-INCH TOUCH SCREEN MONITOR

8. SIMPLE OPERATION

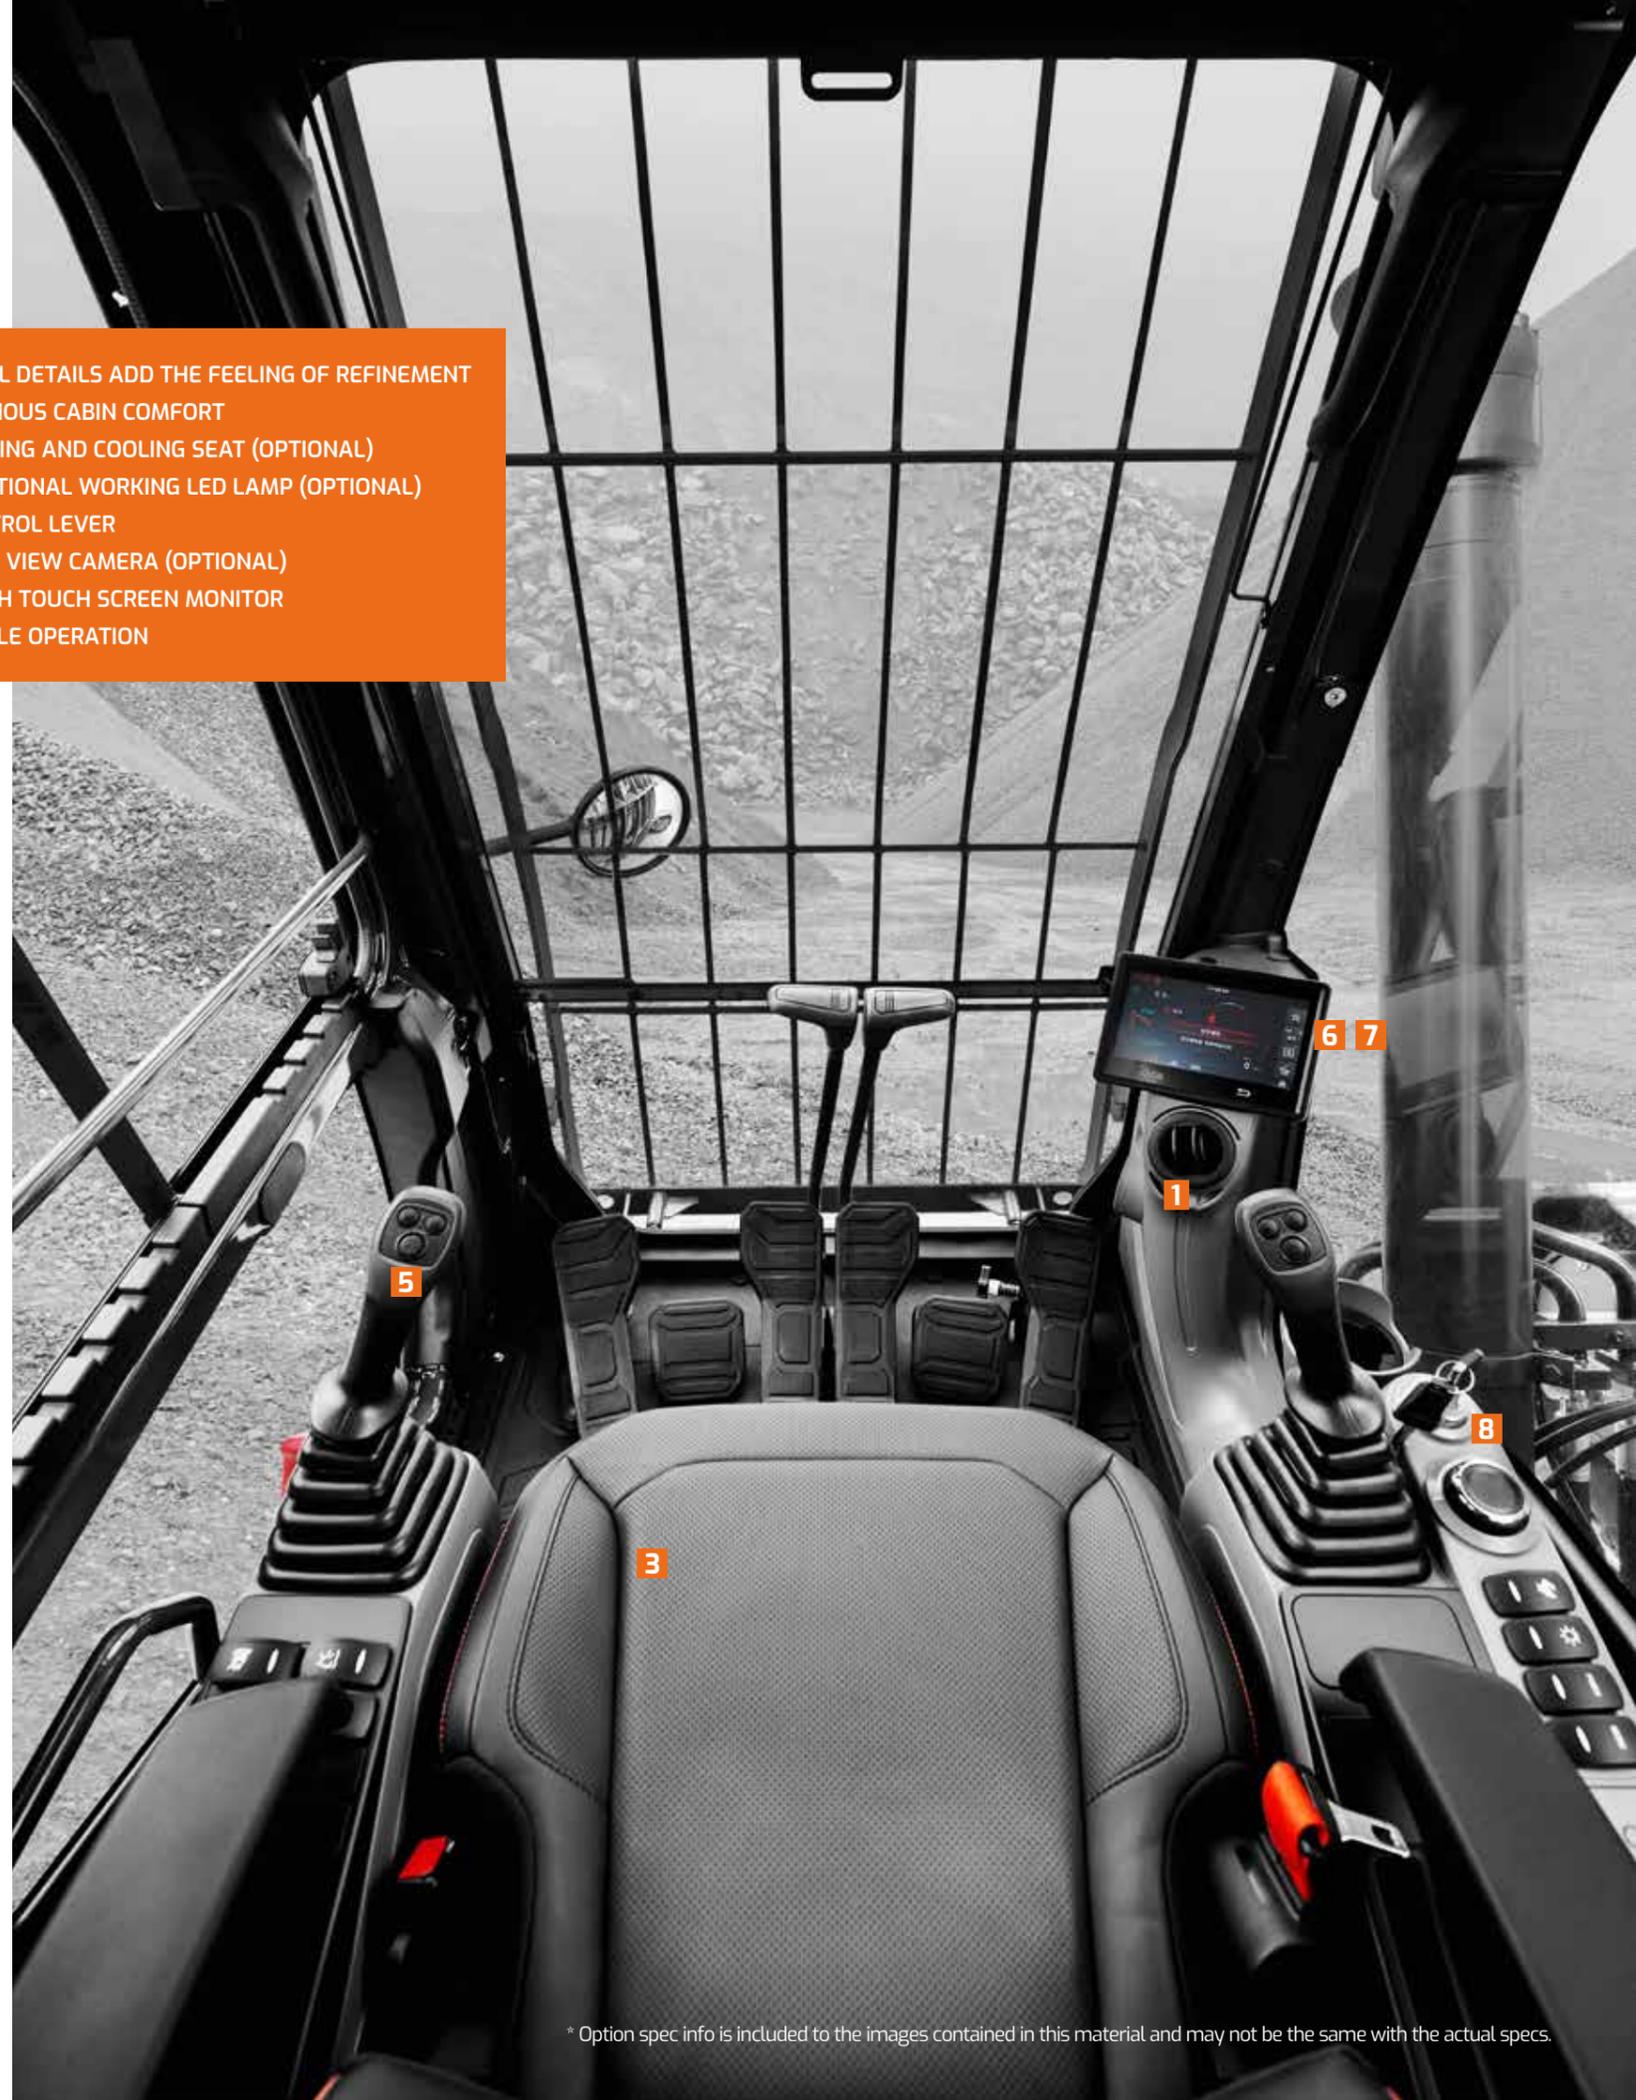

MOVE MORE WITH MINIMUM UPKEEP

Annoying Procedure Can't Slow Your Business Down

Achieve long lasting performance and uptime by smart and easy maintenance and servicing. In order to sustain maximum performance and productivity of your excavator, Develon provides simple solution for maximum uptime. Flexible upkeep and repair options, as well as planned servicing, would extend the life of your excavator. Centralized grease inlets are designed for simple routine maintenance. You can receive and expert assistance are also readily available, DEVELON Fleet Management provides you the operational machine data in an hourly cycle and broad range of service to get the most productivity out of your equipment.





DRY TYPE PRE-CLEANER

The installation of a rotor type pre-cleaner provides better filtering in dusty environments. Increase maintenance interval resulting in more uptime.



CONVENIENT FUSE BOX

The fuse box is conveniently located in a section of the storage compartment behind the operator's seat to provide a clean environment and easy access.



AIR COMPRESSOR (OPTIONAL)

Easily lubricated, highly reliable and low maintenance air compressors are equipped.


DEVELON FLEET MANAGEMENT(OPTIONAL)

Allowing various parameters to be checked during maintenance procedure, such as pump pressure and engine rotation speed. Parameters can be stored and printed for subsequent analysis.



AIR CLEANER

Air cleaner of large capacity removes 99% of airborne particles, reducing the risk of engine contamination.

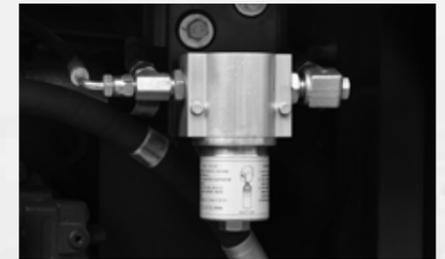

HYDRAULIC OIL RETURN FILTER

Protection of the hydraulic system has been made more effective by applying glass fiber filter technology to the main oil return filter. More than 99.5% of foreign particles are filtered out, significantly increasing oil change interval.



FUEL PRE-FILTER IN WATER SEPARATOR

Highly efficient water separator in fuel to prevent engine damage by removing moisture. Reducing the risk of external engine contamination and lengthen the engine's lifespan.



CENTRALIZED GREASE INLETS FOR EASY MAINTENANCE

The boom & arm grease inlets are grouped for easy access. Remote grease points make it easier to lubricate hard-to-reach pins on the lift arm and articulation system.

MY DEVELON

Telematics Service (OPTIONAL)

TELECOMMUNICATIONS Data flow from machine to web



TELEMATICS TERMINAL

The terminal device is installed and connected to a machine to get machine data.

TELECOMMUNICATION

DEVELON provides Dual mode (Cellular, Satellite) communication to maximize communication coverage

MY DEVELON

Users can monitor the machine status from DEVELON Website & Mobile App

TELEMATICS SERVICE BENEFITS DEVELON and dealer support customers to improve work efficiency with timely and responsive services

CUSTOMER

Improve work efficiency

- Timely and preventive service
- Improve operator's skills by comparing work pattern
- Manage fleet more effectively

DEALER

Better service for customers

- Provide better quality of service
- Maintain machine value
- Better understanding of market needs

DEVELON

Responsive to customer's voice

- Utilize quality-related field data
- Apply customer's usage profile to develop new machine

MAIN FUNCTIONS (WEB/APP) DEVELON Telematics Service provides various functions to support your great performance



OPERATION

You can easily access and manage equipment information and maintenance costs on the platform anytime, anywhere. Retrieve details such as location, uptime, utilization, and fuel costs based on field data, enabling efficient work planning by considering the progress at the job site.



HEALTH

Based on reliable manufacturer information, you can have checklists for each usage cycle and receive replacement cycle reminders for consumable parts. In the event of equipment defects, you will receive notifications and can request service immediately. This ensures swift service support from certified DEVELON dealers and minimizes machine idle time.



LIBRARY

Saving your time to find all the documents about your equipment. We provide monthly operation reports, manuals, parts books and more. This helps you to access to a wide range of information and knowledge of your equipment.



E-COMMERCE

You can purchase a variety of digital products and certified genuine parts for your equipment online. Elevate your experience by subscribing to our exclusive digital services.

GLOBAL PARTS NETWORK

QUALITY-PROVEN MAIN COMPONENTS

Develon provides fast and precise worldwide delivery of genuine Develon parts through its global PDC (parts distribution center) network.




GLOBAL NETWORK

The global network of the GPDC (Global Parts Distribution Center) maximizes its fill rate by making sure that each center is stockpiled with all the critical parts required for businesses in its area. The network also minimizes the time and costs required for parts delivery by positioning PDCs close to major markets around the world. Develon PDCs communicate with customers in their time zone, informing them that they are open for operation, and deliver parts to them as early as possible.

THE GLOBAL PARTS DISTRIBUTION CENTER NETWORK

PDCs had been set up as shown below, including Mother PDC in Ansan, Korea. The ten other PDCs include one in China (Yantai), three in USA (Atlanta, Seattle and Miami), two in Europe (Belgium and the UK), one in the Middle East (Dubai), two in Asia (Singapore and Indonesia) and one in Brazil (São Paulo).

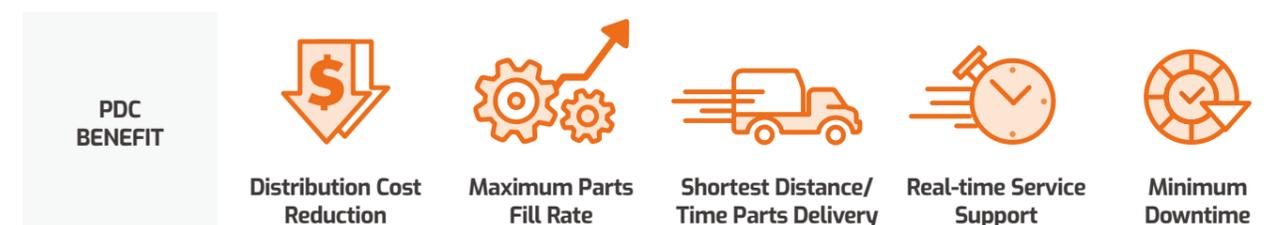

TECHNICAL SPECIFICATION

ENGINE

Model

Develon DC13
2 valves per cylinder, vertical injectors, water cooled, turbo charged with air to air intercooler. The emission levels are well below the values required for phase II.

Number of cylinders

6

Nominal flywheel power

GROSS POWER
257 kW (349.5PS, 344.4HP) @ 1,800 rpm (SAE J1995)
NET POWER
Standard 251.5 kW (342.3PS, 337.3HP) @ 1,800 rpm (SAE J1349)

Max torque

169.6 kgf.m @ 1,400 rpm

Piston displacement

12,700 cc

Bore & stroke

130 mm X 160 mm

Starter

24 V / 6.0 kW

Batteries

2 X 12 V / 200 Ah

Air cleaner

Double element with auto dust evacuation.

HYDRAULIC CYLINDERS

The piston rods and cylinder bodies are made of high-strength steel. A shock absorbing mechanism is fitted in all cylinders to ensure shockfree operation and extend piston life.

Cylinders	Quantity	Bore x Rod diameter x stroke
Boom	2	170 x 115 x 1,485 mm
Arm	1	180 x 120 x 1,820 mm
Bucket	1	160 x 110 x 1,320 mm

ENVIRONMENT

Noise levels comply with environmental regulations (dynamic values).

Sound level guarantee

107 DB (A) (2000/14/EC)

Cab sound level

74 dB (A) (ISO 6396)

WEIGHT

Boom 6,700 mm (22'1") Arm 3,200 mm HD (10'5")

	Bucket	Shoe width	Operating weight	Ground pressure
Triple Grouser	2.14 R2H	600 mm	44,300 kg	0.81 kgf/cm ²
Double Grouser	2.42 R2H	600 mm	44,500 kg	0.81 kgf/cm ²
Triple Grouser	2.42 R2H	750 mm	45,200 kg	0.66 kgf/cm ²
Triple Grouser	2.42 R2H	800 mm	45,400 kg	0.62 kgf/cm ²
Triple Grouser	2.42 R2H	900 mm	45,900 kg	0.56 kgf/cm ²

HYDRAULIC SYSTEM

The heart of the system is the EPOS™ (Electronic Power Optimizing System). It allows the efficiency of the system to be optimized for all working conditions and minimizes fuel consumption.

- The hydraulic system enables independent or combined operations.
- Two travel speeds offer either increased torque or high speed tracking.
- Cross-sensing pump system for fuel savings.
- Auto deceleration system.
- Two operating modes, two power modes.
- Button control of flow in auxiliary equipment circuits.
- Computer-aided pump power control.

Main pumps

2 variable displacement axial piston pumps
Max flow: 2 x 360 l/min

Pilot pump

Gear pump - max flow: 24 l/min

Maximum system pressure

Front

Normal mode : 330 kgf/cm²
Power mode : 350 kgf/cm²
Travel : 330 kgf/cm²
Swing : 280 kgf/cm²

SWING MECHANISM

- An axial piston motor with two-stage planetary reduction gear is used for the swing.
- Increased swing torque reduces swing time.
- Internal induction-hardened gear.
- Internal gear and pinion immersed in lubricant bath.
- The swing brake for parking is activated by spring and released hydraulically.

Swing speed : 0 to 9.1 rpm

UNDER CARRIAGE

Chassis are of very robust construction, all welded structures are designed to limit stresses. High-quality material used for durability. Lateral chassis welded and rigidly attached to the undercarriage. Track rollers lubricated for life, idlers and sprockets fitted with floating seals.

Number of rollers and track shoes per side

Upper rollers : 2 (Standard shoes)
Lower rollers: 9
Shoes : 50
Total length of track : 5,200 mm (17' 1")

DRIVE

Each track is driven by an independent axial piston motor through a planetary reduction gearbox. Two levers with control pedals guarantee smooth travel with counter rotation on demand.

Travel speed (fast/slow)

5.3 / 3.2 km/h (3.3 / 2.0 mph)

Maximum traction force

20,100 / 33,200 kgf (44,312 / 73,193 lbf)

Maximum grade

35 (70%)

BUCKET DIGGING FORCE

Bucket Type	Capacity (m ³)		DIGGING FORCE (NOM./PRESS. UP, TON)
	SAE		
GP	1.44 / 1.68 / 1.9 / 2.16		[SAE] 24.2 / 25.6 [ISO] 27.1 / 28.7
R2H	1.64 / 1.92 / 2.14 / 2.42 / 2.72		[SAE] 25.0 / 26.4 [ISO] 27.6 / 29.2
R2H+	2.14		
R2S	1.77 / 2.02		[SAE] 24.3 / 25.7 [ISO] 27.3 / 28.9
R2X	1.77		
ROCK	1.51		[SAE] 24.2 / 25.6 [ISO] 28.1 / 29.7


BUCKET

DX450LC-7M						Track		Standard Track						
						C/W (kg)		8,000						9,800
						SHOE (mm)		600 TG						
Bucket Type	Capacity (m ³)		Width (mm)		Weight (kg)	6.7m HD Boom			6.7m Boom					
	SAE/PCSA	CECE	W/O Cutter	With Cutter		2.6m Arm	2.95m Arm	3.25m HD Arm	2.6m Arm	2.95m Arm	3.25m Arm	3.95m Arm	3.95m Arm	
General Purpose	1.44	1.29	1,192	1,273	1,439	A	A	A	A	A	A	A	A	
	1.68	1.50	1,348	1,429	1,541	A	A	A	A	A	A	A	A	
	1.9	1.7	1,466	1,547	1,654	A	A	A	A	A	A	B	A	
	2.16	1.92	1,664	1,745	1,782	A	A	B	A	A	B	C	A	
H Class	1.64	1.49	1,256	1,290	1,601	A	A	A	A	A	A	A	A	
	1.92	1.72	1,430	1,464	1,729	A	A	A	A	A	A	B	A	
	2.14	1.91	1,566	1,600	1,860	A	A	B	A	A	B	C	A	
	2.42	2.16	1,738	1,772	1,986	B	B	C	B	B	C	C	B	
	2.72	2.42	1,926	1,960	2,154	C	C	D	C	C	C	D	C	
H+ Class	2.14	1.92	1,566	1,600	1,960	A	A	B	A	A	B	C	B	
S Class	1.77	1.59	1,364	1,364	2,128	A	A	A	A	A	A	B	A	
	2.02	1.81	1,518	1,518	2,266	A	A	B	A	A	B	C	B	
ROCK	1.51	1.31	1,497	-	1,643	A	A	A	A	A	A	A	A	

Based on ISO 10567 and SAE J296, arm length without quick change clamp
A : Suitable for materials with density of 2,100kg/m³ (3,500 lb/yd³) or less
B : Suitable for materials with density of 1,800kg/m³ (3,000 lb/yd³) or less

C : Suitable for materials with density of 1,500 kg/m³ (2,500 lb/yd³) or less
D : Suitable for materials with density of 1,200 kg/m³ (2,000 lb/yd³) or less
X : Not recommended

DIMENSIONS

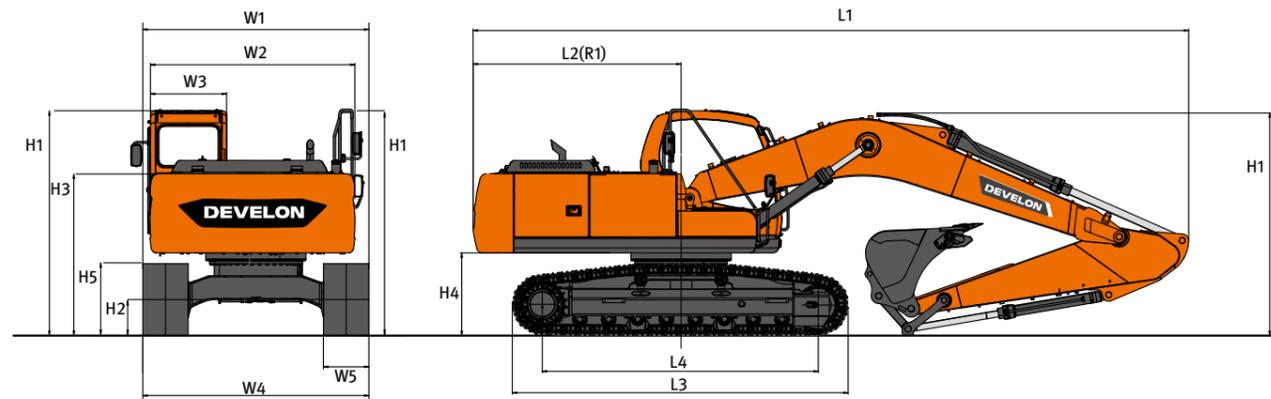


DIMENSIONS

Model		DX450LC-7M						
Dimension		STD	OPT1	OPT2	OPT3			
Boom	mm	6,700	6,700	6,700 HD	6,700			
Arm	mm	3,250	2,950	2,600	3,950			
Bucket (PCSA)	m ³	2.14 R2H	2.42 R2H	2.42 R2H	1.64 R2H			
Undercarriage (Track+Grouser)		mm	LC 600 TG	LC 600 TG	LC 600 TG	LC 600 TG		
Overall	L1	Overall Length	mm	11,740	11,830	11,865	11,740	
	H1	Overall Height	Boom	mm	3,355	3,570	3,595	3,390
			Hose	mm	3,465	3,710	3,695	3,495
			Cabin	mm	3,210	3,210	3,210	3,210
	W1	Overall Width (SHIPPING)	mm	3,350	3,350	3,350	3,350	
L2 (R1)	Rear Swing Radius	mm	3,760	3,760	3,760	3,760		
H2	Ground Clearance*	mm	*585	*585	*585	*585		
Swing Body	W2	House Width	Frame only	mm	2,990	2,990	2,990	2,990
			w/Catwalk	mm	3,296	3,296	3,296	3,296
			w/Protector	mm	3,103	3,103	3,103	3,103
	W3	Cabin Width	mm	1,010	1,010	1,010	1,010	
H3	Height Over Cover	mm	2,360	2,360	2,360	2,360		
H4	Counterweight Clearance*	mm	*1,270	*1,270	*1,270	*1,270		
Undercarriage	H5	Track Height*	mm	*1,070	*1,070	*1,070	*1,070	
	L3	Track Length	mm	*5,200	*5,200	*5,200	*5,200	
	L4	Tumbler Distance	mm	4,250	4,250	4,250	4,250	
	W4	Undercarriage Width	STD	mm	3,350	3,350	3,350	3,350
	W5		Shoe Width	mm	600	600	600	600
	Grouser Height	mm	36	36	36	36		
CAB	-	Cabin Height	mm	853	853	853	853	

*: without grouser

WORKING RANGES

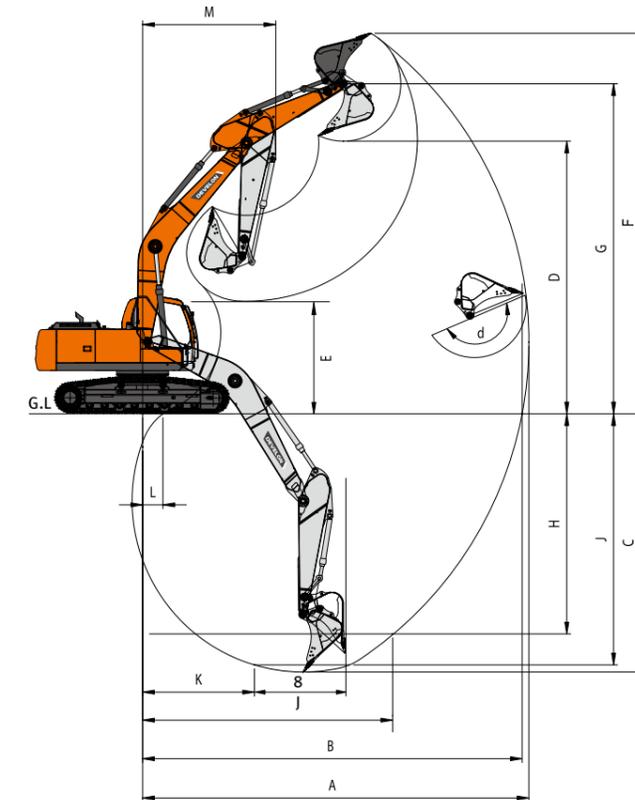

WORKING RANGE

BOOM LENGTH	mm	6,700			
ARM TYPE	mm	3,250	2,600	2,950	3,950
BUCKET TYPE (SAE)	m ³	2.14 H R2H	2.42 R2H	2.14 R2H	1.64 R2H
A MAX. DIGGING REACH	mm	11,430	10,810	11,130	12,120
B MAX. DIGGING REACH (GROUND)	mm	11,210	10,575	10,905	11,910
C MAX. DIGGING DEPTH	mm	7,635	6,980	7,355	8,335
D MAX. DUMPING HEIGHT	mm	7,810	7,485	7,630	8,200
E MIN. DUMPING HEIGHT	mm	3,095	3,760	3,395	2,395
F MAX. DIGGING HEIGHT	mm	10,615	10,265	10,420	11,045
G MAX. BUCKET PIN HEIGHT	mm	9,485	9,160	9,310	9,875
H MAX. VERTICAL WALL DEPTH	mm	3,075	2,430	2,755	3,815
I MAX. RADIUS VERTICAL	mm	10,105	9,735	9,935	10,475
J MAX. DIGGING DEPTH(8°LEVEL)	mm	7,455	6,755	7,155	8,185
K MIN. RADIUS 8° LINE	mm	3,415	3,370	3,380	3,465
L MIN. DIGGING REACH	mm	800	2,390	1,780	-205
M MIN. SWING RADIUS	mm	4,475	4,495	4,505	4,555
d. BUCKET ANGLE (DEG)	°	177	177	177	177

STANDARD & OPTION

STANDARD EQUIPMENT

Boom & Arm

- 6.7 m Boom (HD)
- 3.2 m Arm (HD)

Hydraulic system

- Boom and arm flow regeneration
- Boom and arm holding valves(MCV)
- Swing anti-rebound valves
- Spare ports (Control valve)
- One-touch power boost

Cabin & Interior

- All weather sound suppressed type cab
- Air conditioner & Heater
- Adjustable suspension seat with head rest and adjustable arm rest
- Pull-up type front window and removable lower front window
- Room light
- Intermittent windshield wiper
- Cup holder
- Hot & Cool box
- LCD color monitor panel
- E/G RPM control dial
- AM/FM radio + MP3 (USB)
- 12V,24V power socket
- Serial communication port for laptop PC interface
- Joystick lever with 3 switches
- Plastic roof cover

Safety

- Large handrails and step
- Convex metal anti-slip plates
- Seat belt
- Hydraulic safety lock lever
- Safety glass
- Hammer for emergency escape
- Right and left rearview mirrors

Others

- Double element air cleaner
- Additional water separator
- Dry type pre cleaner
- Dust screen for radiator/oil cooler
- Engine overheat prevention system
- Engine restart prevention system
- Self-diagnostic system
- 80 A Alternator (28 V, 50 amps)
- Electric horn
- Halogen working lights (frame mounted 1, boom mounted 2)
- Hydraulic track adjuster
- Normal track guards
- Greased and sealed track link
- Hydraulic oil tank air breather filter
- Long & Fixed track
- Counterweight (8.0 Ton)
- 600 TG Shoe

OPTIONAL EQUIPMENT

Some of optional equipments may be standard in some markets. Some of this optional equipment is not available in some markets. You must check with the local DEVELON dealer to know about the availability or to release the adaptation following the needs of the applications.

Boom & Arm

- 6.7 m Boom
- 2.6 m Arm (HD)
- 2.95 m Arm (HD)
- 3.25 m Arm
- 3.95 m Arm

Safety

- Boom and arm hose rupture protection valve
- Overload warning device
- FOGS (ISO 10262, FOGS standard)
- Alarm(Travel & Swing & QC)
- Rotating beacon
- LED lights
- Camera
 - Rear View Camera
 - Side & Rear View Camera
 - Around View Monitor
- Lock valve
- Seat belt warning
- Side protector & catwalk
- Cabin front guard (Upper and lower guard)
- ROPS Cabin

Cabin & Interior

- Air suspension seat
- Rain Shield
- High seat Mount
- Breaker pedal
- Steel roof cover
- Additional mirror
- DAB Audio
- Rear sun visor
- Artificial leather
- Heating & cooling seat

Others

- Piping option
 - Piping for Rotating (PERO)
 - Piping for Two way
 - Piping for Breaker
 - Piping for Quick clamp
- Shoe (mm)
 - 600DG / 750TG / 800TG / 900TG
- Lower wiper
- Fuel filler pump
- Additional work lamp (HAL or LED)
 - 4-front / 2-rear on cabin
 - 2-front on cabin
- Hydraulic Oil
 - Cold weather (VG32)
 - Tropical weather (VG68)
- Breaker filter
- Water separator
 - Water separator with heater
 - Water separator for BIO diesel
- Heavy duty under cover
- Heavy duty & Fixed track
- Auto greasing unit
- Fuel filler pump
- Air compressor
- Counterweight(9.8 Ton for Demolition)
- Double or Full track guard
- Overload warning device
- Develon Fleet Management
- Lever pattern change
- Electric Transfer Pump